



Natural Stone is a relatively hard, naturally formed mineral or petrified matter, produced by nature. Therefore, considerable variations including, but not limited to, color, texture, size, and cleft will occur in all natural stone. Samples, sample panels, brochures, photographs, computer-generated pictures, and the Internet may be, in some measure, different from the stone you actually receive. Laboratory tests, if conducted, are performed on small samples and cannot be totally accurate because of the limited scale of the tests. Please be sure that all involved parties are aware of these facts, so an informed decision can be made regarding natural stone.

Use of Chemicals: Acid or chemical cleaners are not recommended because of the inability of the user to control its use, and are never recommended for Limestone and Marble. User accepts all risks.

DISCLAIMER OF WARRANTY AND DAMAGES:


Rolling Rock Building Stone Inc. products are provided to you "AS IS" without warranty of any kind, either expressed or implied, including, but not limited to the implied warranties of merchantability, or fitness for a particular purpose.

Rolling Rock Building Stone, Inc., 40 Rolling Rock Road, Boyertown, PA 19512
 Phone: (610) 987-6226, Fax: (610) 987-9779, Web: www.rollrock.com

Berkshire™ Product Guide

Pattern Cut Pavers

Nominal Size Imperial, inch	Actual Size Metric, cm	Thickness Inches, (cm)	Average Pieces Per Crate	Approx. Weight Per Crate lbs.
12 x 12	30 x 30	1, (2.5cm)	160	2360
12 x 24	30 x 60		80	2360
18 x 24	45 x 60		80	3540
24 x 24	60 x 60		40	2360
24 x 36	60 x 90			3540
Mixed Sizes	8 pc. pattern			82 = 200SF

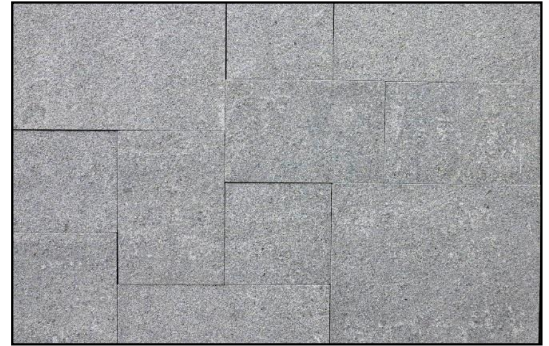

Coping, Hearths, Treads, Sills & Steps

	Actual Size (Imperial) Inch x feet-inch	Thickness (Inches)	Average Pieces Per Pallet	Approx. Weight Per Pallet (lbs.)	
TV Sill	2.5 x 48	2	50	1229	
Hearths, Treads					
	12 x 72		12		2124
	12 x 96				2832
	14 x 72				2478
	14 x 96				3304
	18 x 72				3186
	18 x 96				4248
Heavy Steps	24 x 72	6		4248	
	24 x 96			5664	
	18 x 48		6	6	3186
	18 x 72		4	3186	



Berkshire™ Product Specifications

Geology: Granite

Density ASTM C97: 174.3 lbs./ft³

Water Absorption ASTM C97: 0.08%

Compressive Strength ASTM C170:

Dry Parallel 27080 psi, Wet Parallel 27380 psi,

Dry Perpendicular 19570 psi, Wet Perpendicular 15470 psi

Modulus of Rupture ASTM C99: 2800 psi dry, 2850 psi wet

Product Type & Finish:

- **Pattern Cut Pavers:** Sawn 6 sides with thermal finish top.
- **Sill, Coping, Tread, Hearth:** Sawn 6 sides with thermal finish top and rock-pitched face on 1 long edge.
- **Heavy Steps:** Sawn 6 sides with thermal finish top and rock-pitched face on 1 long and 2 short edges.

Pattern Cut Size: Berkshire™ Pavers are cut to near precise metric dimensions, producing a very high quality product having square corners. Imperial length and width measurements as indicated in inches reflect a nominal size which is approximately 1/2" short of the full dimension.

Special Notice on Pattern Size: This product is an excellent choice for dry-laid work due to the stone's uniform thickness & cut-to-square quality in addition to the ability to match pieces without extensive field cutting. (Example - Two 30 cm lengths = 60 cm.)

Custom: On larger projects with proper planning and advance notice we can order special sizes or custom fabricated material from the factory to meet job specific requirements in an effort to reduce on site time and labor and reduce overall project cost. Please consult a sales representative for more information.



www.imPORTstone.net