



Rolling Rock Building Stone Inc. 40 Rolling Rock Rd Boyertown, PA 19512
 Phone: 610-987-6226, Fax 610-987-9779 www.RollRock.com

Natural Stone is a relatively hard, naturally formed mineral or petrified matter, produced by nature. Therefore, considerable variations including, but not limited to, color, texture, size, and cleft will occur in all natural stone. Samples, sample panels, brochures, photographs, computer-generated pictures, and the Internet may be, in some measure, different from the stone you actually receive. Laboratory tests, if conducted, are performed on small samples and cannot be totally accurate because of the limited scale of the tests. Please be sure that all involved parties are aware of these facts, so an informed decision can be made regarding natural stone.

Use of Chemicals: Acid or chemical cleaners are not recommended because of the inability of the user to control its use, and are never recommended for Limestone and Marble. User accepts all risks.

DISCLAIMER OF WARRANTY AND DAMAGES:

Rolling Rock Building Stone Inc. products are provided to you "AS IS" without warranty of any kind, either expressed or implied, including, but not limited to the implied warranties of merchantability, or fitness for a particular purpose.

Brownstone™ Product Guide - Page 1

Pattern Cut Pavers

Nominal Size Imperial, inch	Actual Size Metric, cm	Thickness Inches, (cm)	Average Pieces Per Crate	Approx. Weight Per Crate lbs.
12 x 12	30 x 30	1-3/16 (3cm)	128	2100
12 x 24	30 x 60		64	2100
18 x 18	45 x 45			2350
18 x 24	45 x 60			3140
24 x 24	60 x 60			32
24 x 36	60 x 90		3140	
Mixed Sizes	8 pc. pattern		82 = 200SF	3300



Brownstone Product Specifications

Geology: Sandstone

ASTM C97 Density: 159.7 lbs/ft³

ASTM C97 Absorption: 1.55%

ASTM C99 Modulus of Rupture: 1720 PSI (Dry/ Perpendicular), 760 PSI (Wet, Perpendicular)

ASTM C170 Compressive Strength: 15400 PSI (Dry/ Parallel), 8770 PSI (Wet, Parallel)

11390 PSI (Dry/ Perpendicular), 7050 PSI (Wet, Perpendicular)

Product Type & Finish:

- *Pattern Cut Pavers:* Sawn 6 sides with thermal top.
- *Sill & Tread Stock:* Sawn 6 sides with thermal top and rock-pitched face on 1 long & 2 short edges. P = polished, H = honed.
- *Bull Nose:* Sawn 6 sides with thermal top, one long bull nose finish.
- *Pier Caps:* Sawn 6 sides with thermal top and rock-pitched face on 4 edges.
- *Wall Caps:* Sawn 6 sides with thermal top and rock-pitched face on 2 long edges.
- *Heavy Steps:* Same finish as Sill & Tread Stock.
- *Oversize:* Various size cutting stock with thermal top and custom cut to your desired shape and finish.

Pattern Cut Size: Brownstone Pavers are cut to near precise metric dimensions, producing a very high quality product having square corners. Imperial length and width measurements as indicated in inches reflect a nominal size which is approximately 1/2" short of the full dimension.

Special Notice on Pattern Size: This product is an excellent choice for dry-laid work due to the stone's uniform thickness & cut-to-square quality in addition to the ability to match pieces without extensive field cutting.

(Example - Two 30 cm lengths = 60 cm.)

Oversize: Various size slabs are available in 2", 3" & 4" thickness for custom fabrication work by Rolling Rock.

Custom: On larger projects with proper planning and advance notice we can order special sizes or custom fabricated material from the factory to meet job specific requirements in an effort to reduce on site time and labor and reduce overall project cost. Please consult a sales representative for more information.





Natural Stone is a relatively hard, naturally formed mineral or petrified matter, produced by nature. Therefore, considerable variations including, but not limited to, color, texture, size, and cleft will occur in all natural stone. Samples, sample panels, brochures, photographs, computer-generated pictures, and the Internet may be, in some measure, different from the stone you actually receive. Laboratory tests, if conducted, are performed on small samples and cannot be totally accurate because of the limited scale of the tests. Please be sure that all involved parties are aware of these facts, so an informed decision can be made regarding natural stone.

Use of Chemicals: Acid or chemical cleaners are not recommended because of the inability of the user to control its use, and are never recommended for Limestone and Marble. User accepts all risks.


Rolling Rock Building Stone Inc. 40 Rolling Rock Rd Boyertown, PA 19512
Phone: 610-987-6226, Fax 610-987-9779 www.RollRock.com

DISCLAIMER OF WARRANTY AND DAMAGES:
Rolling Rock Building Stone Inc. products are provided to you "AS IS" without warranty of any kind, either expressed or implied, including, but not limited to the implied warranties of merchantability, or fitness for a particular purpose.

Brownstone™ Product Guide - Page 2

Coping, Hearths, Mantles, Sills, Treads; Wall and Pier Caps

	Actual Size Imperial Inch x feet-inch	Thickness Inches	Average Pieces Per Crate	Approx. Weight Per Crate (lbs.)
TV Sill	2.5 x 48	2	50	1140
Sill Sizes	6 x 72		24	1950
	8 x 72			2570
Tread Sizes	12 x 48	2	12	1290
	12 x 72			1950
	12 x 96			2550
	14 x 48			1500
	14 x 72			2250
	14 x 96			3000
	18 x 72			2900
	18 x 96			3860
Hearth Sizes	24 x 48	2	12	2560
	24 x 72			3850
	24 x 96			5100
Bull Nose	14 x 48	2	12	1500
Pier Caps	26 x 26	2	15	1900
	30 x 30		10	1780
	36 x 36		2400	
Chimney Cap	36 x 48	1.5	12	2900
Wall Caps	18 x 48	3	8	1930
	24 x 48			2570
	18 x 48			1930
	24 x 48	4	2570	
Oversize	30 x 72	2	8	3200
	48 x 84		4	3000
	48 x 84 P		4	3000
	30x 72	3	4	2400
	48 x 84		3	3400
	30 x 72		4	2400
	48 x 84	2	3000	
Heavy Steps	18 x 4-0	6	6	2900
	18 x 6-0		4	
Fence Posts	6 x 8-0	6	6	1950
Table Top	40 x 72 H	2	6	3000

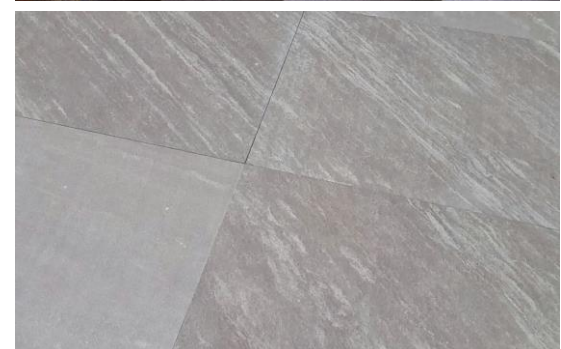

Brownstone Product Specifications

Geology: Sandstone

ASTM C97 Density: 159.7 lbs/ft³

ASTM C97 Absorption: 1.55%

ASTM C99 Modulus of Rupture: 1720 PSI (Dry/ Perpendicular), 760 PSI (Wet, Perpendicular)

ASTM C170 Compressive Strength: 15400 PSI (Dry/ Parallel), 8770 PSI (Wet, Parallel)

11390 PSI (Dry/ Perpendicular), 7050 PSI (Wet, Perpendicular)

Product Type & Finish:

- **Pattern Cut Pavers:** Sawn 6 sides with thermal top.
- **Sill & Tread Stock:** Sawn 6 sides with thermal top and rock-pitched face on 1 long & 2 short edges.
P = polished, H = honed.
- **Bull Nose:** Sawn 6 sides with thermal top, one long bull nose finish.
- **Pier Caps:** Sawn 6 sides with thermal top and rock-pitched face on 4 edges.
- **Wall Caps:** Sawn 6 sides with thermal top and rock-pitched face on 2 long edges.
- **Heavy Steps:** Same finish as Sill & Tread Stock.
- **Oversize Slabs:** Various size cutting stock with thermal top and custom cut to your desired shape and finish.

Pattern Cut Size: Brownstone Pavers are cut to near precise metric dimensions, producing a very high quality product having square corners.

Imperial length and width measurements as indicated in inches reflect a nominal size which is approximately 1/2" short of the full dimension.

Special Notice on Pattern Size: This product is an excellent choice for dry-laid work due to the stone's uniform thickness & cut-to-square quality in addition to the ability to match pieces without extensive field cutting.

(Example - Two 30 cm lengths = 60 cm.)

Oversize: Various size slabs are available in 2", 3" & 4" thickness for custom fabrication work by Rolling Rock.

Custom: On larger projects with proper planning and advance notice we can order special sizes or custom fabricated material from the factory to meet job specific requirements in an effort to reduce on site time and labor and reduce overall project cost. Please consult a sales representative for more information.



www.imPORTstone.net